

Description

A remote control switch for auto motive users, using mainly as a starter, closing load with a 24 V rated voltage. All products can be customized in two ways: by printing your logo on the side of the case or moulding your logo on the case.

Technical data

| | | |
|-----------------------|------------|---|
| Nominal Voltage | U_N | 24 V |
| Operating Voltage | U_{OP} | 18 V...30 V |
| Pull- In Voltage | U_I | $\leq 18 V @ TP$ |
| Pull-Off Voltage | U_O | $\geq 5 V @ TP$ |
| Test Voltage | U_P | 26 V \pm 0,4 V |
| Test Temperature | T_P | 23 °C \pm 2 °C |
| Coil Current | I_C | 180 mA \pm 5 % |
| Nominal Current | I_N | 100 A |
| Short Time Current | I_M | 100 A Intermittent Working 10 s ON / 10 s OFF 80 A Continuous Working |
| Voltage Drop | ΔU | $\leq 100 mV @ IN$ |
| Operating Temperature | T_{OP} | -40 °C...+100 °C |
| Storage Temperature | T_{STO} | +125 °C |
| Life Time | | 100.000 times/TP @ IN 10"ON / 10"OFF |


Materials

| | |
|---------------------|--|
| Baseplate | Nylon PA 6,6 + 30 % black |
| Cap | Nylon PA 6,6 + 15 % black |
| Terminals | Cu Zn Fastons 85-86 (6,3x0,8mm) M6 30-87 Nut M6 Fe (Zinc) |
| Screw Terminals | Cu Zn M6 30-87 Nut M6 Fe (Zinc) |
| Contacts | \varnothing 6 mm FIXED - \varnothing 7 mm MOBILE: Ag SnO2 ALLOY |
| Optionals | Resistance / Diode |
| General Description | Sealed and washable |
| Bobbin Coil | 4500 Spire \varnothing 0,095 S 155° |
| Spring | Cu Be 17410 1/2 HT |
| Braid | Cu flexible with double sealing |




HPR10-404-1
Normally Open


Dimensions

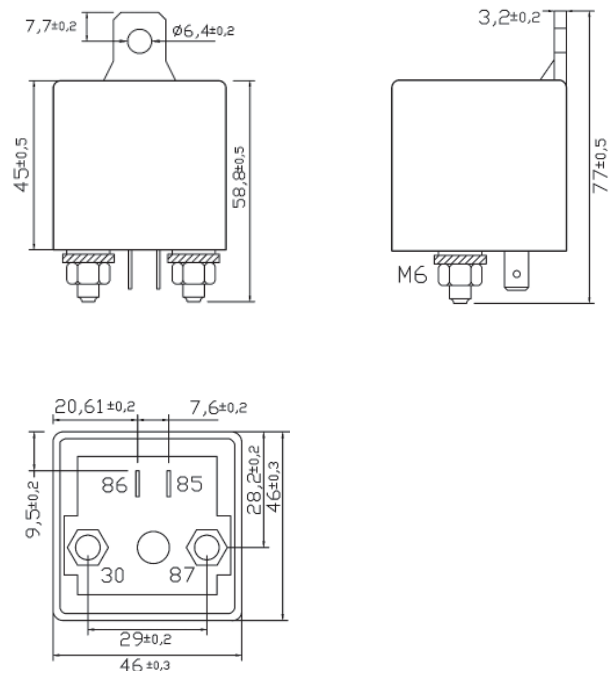

Wiring diagram



Technical diagram



| Our code | Relay | Voltage | Max Intesity | Pins | Info | Connection Board | Technical Diagram |
|-------------|---------------|---------|--------------|------|-----------------|------------------|-------------------|
| HPR10-404-1 | Normally Open | 24 V | 100 A | 4 | Plastic Bracket | | |

Functions Parameter

Nominal Current

Resistive Load N.O. 100 A 26 V DC

Coil Parameters

| Rated Voltage | Rated Current ±10 % at 20 °C (mA) | Coil Resistance ±10 % at 20 °C (Ω) | Max Continuous Voltage at 85 °C | Pick Up Voltage (Max) at 23 °C | Drop Up Voltage (Min) at 23 °C | Power Consumption at Rated Voltage |
|---------------|---|--|------------------------------------|-----------------------------------|-----------------------------------|---------------------------------------|
| 24 | 180 | 130 | 133% of rated voltage | 75 % of rated voltage | 20% of rated voltage | ≈ 6 W |

Function Details

Contact Voltage Drop MAX 100 mV a 100 A

Operate Time 10 ms MAX

Release Time 10 ms MAX

Insulation Time 20 MΩ MIN (500 V DC)

Dielectric Strength AC 500 V 50 Hz 1 min

Vibration Resistance 10 ~ 500 Hz 5.0 G

Life Expectancy

Mechanical: 1.000.000 Cycles

Electrical: (10 sec ON 10 sec OFF)

100 A of resistance

1.000.000 Cycles

Temperature

Operative Range -40° C... +100° C

Storage Temperature MAX 125 °C

Max Ambient Temperature Available Vs Coil Voltage for a continuous working

